

DH-KIT/HCVR4104C-S3/4-HFW1000R-0360B-S2

4 CH 720P HD Surveillance Security System



Features

- SUPPORT P2P,ALLOWING EASIER HOME APPLICATIONS
- ALL CHANNEL SYNCHRONOUS REALTIME PLAYBACK
- ALL CAMERAS WITH 720P REALTIME PREVIEW
- H.264 DUAL-STREAM VIDEO COMPRESSION
- HDMI/VGA SIMULTANEOUS VIDEO OUTPUT
- ALL CHANNEL NON-REALTIME 720P RECORDING
- MULTIPLE NETWORK MONITORING:WEB-BROWSER,SMART PHONE/TABLET APP

DH-KIT/HCVR4104C-S3/4-HFW1000R-0360B-S2

Technical Specifications

Model		DH-KIT/HCVR4104C-S3/4-HFW1000R-0360B-S2
System		
Main Processor	Embedded processor	
Operating System	Embedded LINUX	
Video		
Input	4 channel, BNC	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)	
Display		
Interface	1 HDMI, 1 VGA	
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600	
Display Split	1/4/6	
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.264/G.711	
Record Rate	Main Stream:	1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF(1~25/30fps)
	Extra Stream	CIF/QCIF(1~15fps)
Bit Rate	1~4096Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup		
Sync Playback	1/4	
Search Mode	Time/Date, MD & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Internal SATA burner/Network	
Network		
Ethernet	RJ-45 port (10/100M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		

DH-KIT/HCVR4104C-S3/4-HFW1000R-0360B-S2


Internal HDD	1 SATA port, up to 6TB
Auxiliary Interface	
USB Interface	2 ports(2 Rear), USB2.0
General	
Power Supply	DC12V/2A
Power Consumption	10W(without HDD)
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Camera	
Image Sensor	1/4" 1Megapixel CMOS
Effective Pixels	1280(H)×720(V)
Electronic Shutter	1/50s~1/100,000s, 1/60s~1/100,000s
Video Frame Rate	25fps/30fps@720P
Synchronization	Internal
Mini. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output
Max. IR LEDs Length	20m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D
Focal Length	3.6mm fixed lens
Angle of View	H: 58.5°
Mount Type	M12
Power Supply	DC12V±25%
Power Consumption	Max 3.5W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Ingress Protection	IP67
Carton	
Dimension(W×D×H)	387mm×254mm×396mm

PACKAGE:

- HCVR4104C-S3(Mouse,12V/2A Power Adapter) *1
- HAC-HFW1000R-0360B-S2 *4
- 60 Feet BNC&Power Cable *4
- 12V/0.7A*4 Power Adapter for Camera *1

DH-KIT/HCVR4104C-S3/4-HFW1000R-0360B-S2

System Connection

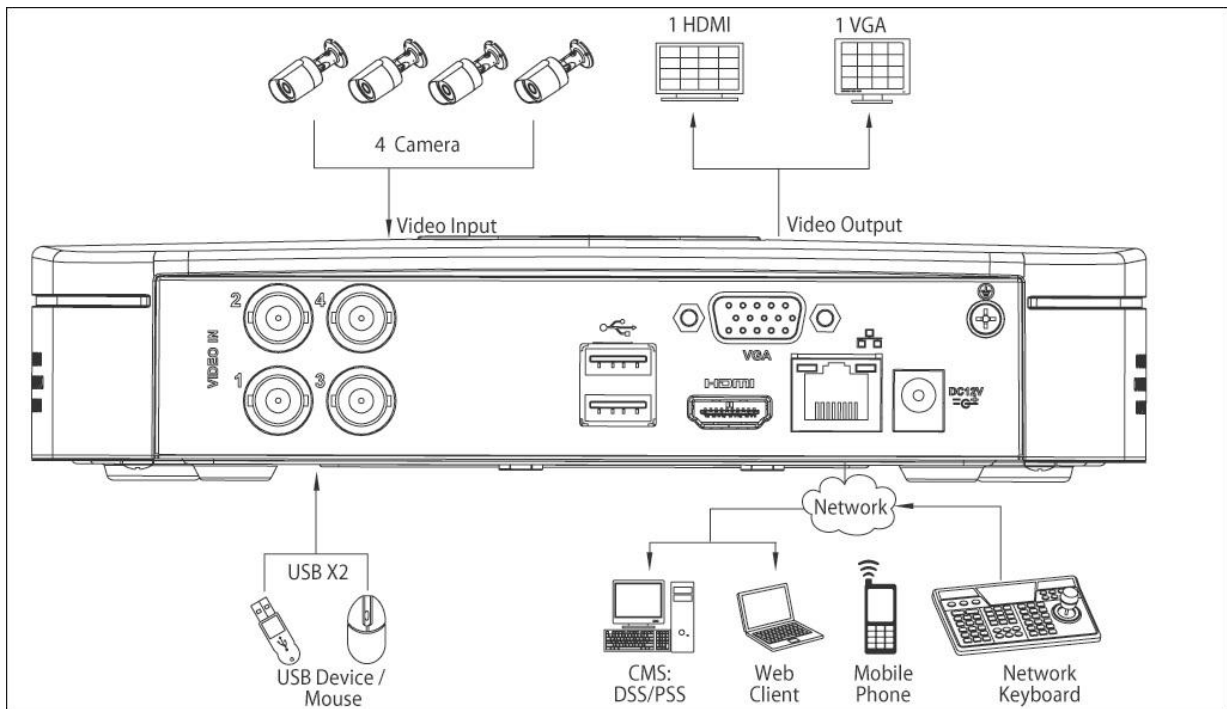

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.